

APPRON

ANDALAN ALARM KEBAKARAN


Combination Smoke and Heat Detector



MC-500

■ Characteristics /

- * Latching function helps to identify alarm device clearly and quickly.
- * Address coding by dip switch makes the job easier.
- * Magnetic test feature makes maintenance easy and simple.
- * The standard detector is 2-wire or 3-wire. For 4-wire type just add one relay output module on 3-wire base. Simple and easy module placement enables wider application and flexible stock control.
- * Detector is made of high endurance, solid and colorfast Fire-proof plastic.
- * Non-loosening screws on base terminal for easy installation.
- * Detector has passed strict EMC test, which greatly eliminates false alarms caused by interference from nearby sources.
- * Dual LEDs for 360-degree visibility. Bi-color LED, Stand-by Status: Green; Alarm Status: Red.

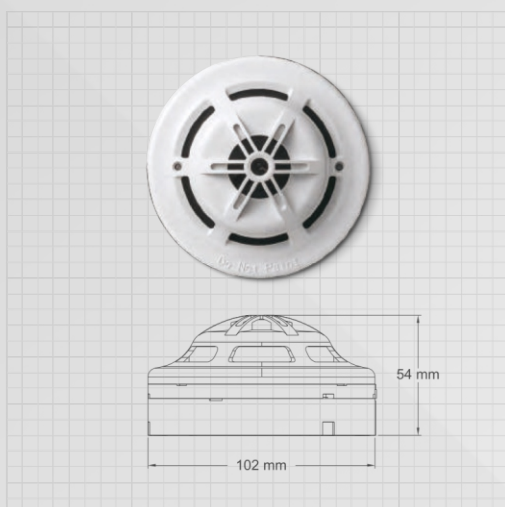

■ Specifications /

Approvals: EN54  

Model	MC-500 Addressable Combination Smoke & Heat Detector		
Address Coding	Binary	Ambient Temperature	0°C ~ +50°C
Alarm Current	DC 26V 6mA	Material	Fire-proof plastic
Standby Current	DC 26V 850µA	Dimensions	120 mm (Dia.) x 54 mm (H)
Sensitivity Setting	Comply to EN54	Weight	About 130g
Thermal Setting	58° C	Color	White

■ Effective Alert Area /

Building Height	Area Covered	Notes
Under 4M	150 M ²	Prohibit from being installed at the places with large volume of smoke and steam lingering, and the inlet and outlet of cold and warm air.
4 ~ 20M	75 M ²	