


APPRON

ANDALAN ALARM KEBAKARAN

Addressable Module

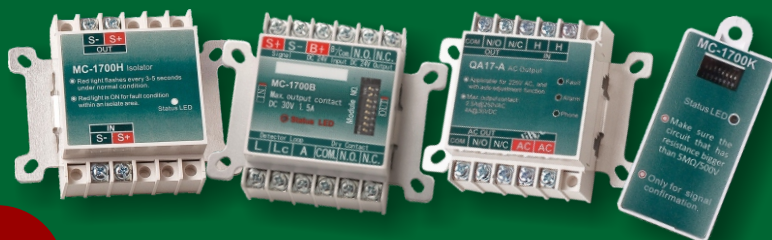

MC-1700 Module Series

Characteristics /

- * Low power consumption in monitoring mode, high stability.
- * Easy installation, either single module installation or several modules installed on a special mounting bar. Implanted type gang box is available to suit the decoration design.
- * The Module is designed with separate input and output contacts to decrease the difficulty of moving external wiring.
- * Control Module MC-1700 B is designed to control input & output for all kinds of systems. (fire alarm, smoke evacuation, sprinkler, foam , winding door...etc.)
- * Output module MC-1700 A can directly connect with power source. The output voltage from N.O. & N.C. will be the same as input voltage.
- * Monitor module MC-1700 K is designed to monitor security condition, such as water supply, pump action ...etc.

Approvals:

Specifications /

Model	MC-1700K	MC-1700B	MC-1700A	MC-1700H
Type	Monitor Module	Control Module	Output Module	Isolator Module
Purpose	Confirmation of external signal	Input & Output for all systems	Supply higher current such as evacuation	Isolate from control unit when external fault
System Connected	Receive activation signal from external device	Series with conventional detector	Series with MC-1700B	Series with all system zone
Input Source	Activation Signal	Loop Signal	240VDC / 110VAC / 220VAC	Zone short circuit
Output Contacts/Load	N/A	1 in 2 out COM. N.O. N.C. 1.5A @30V DC	COM. N.O. N.C. 4A @30V DC 2.5A @ 250VAC	N/A
EOL Resistor	10kΩ	10kΩ	N/A	N/A
Address Coding	Binary	Binary	N/A	N/A
Ambient Temperature	0°C ~ +50°C			
Material	Fire-proff Plastic			
Color	Green			
Dimensions (mm) H x W x D	55 x 27 x 16 mm	60 x 76 x 31 mm		



APPRON

APPRON FIRE FIGHTING SUPPLIER

CATALOG NO. MC-1700-SERIES-AP2022

ORIGINAL PRODUCT APPRON ID#000636372