


APPRON

HYDRANT FIRE HOSE

RED RUBBER FIRE HOSE

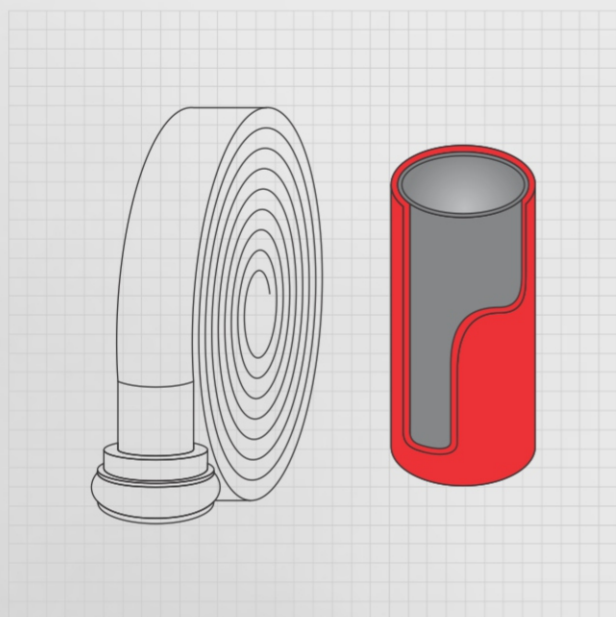

Available with All International Fittings



■ Features /

APPRON Original Marking in the form of a embossed & laser marked logo in fitting & coupling cover rubber.
APPRON Red Rubber Fire Hose is high quality fire hose for use by professional Fire Fighters in the most demanding situations. It is constructed with an all synthetic woven textile reinforcement encased in high tensile PVC / Nitrile rubber forming a unified lining and cover.

■ Specifications /

SERTIFIKAT PENGUJIAN
LAB PMK D.K.I JAKARTA
NO. 64 / TB.06.01



Part Number	FHR-1520	FHR-1530	FHR-2020	FHR-2030	FHR-2520	FHR-2520
Size (Dia. x Length)	Ø1,5" x 20 M	Ø1,5" x 30 M	Ø2" x 20 M	Ø2" x 30 M	Ø2,5" x 20 M	Ø2,5" x 30 M
Working Pressure	1.6 - 2.0 MPa / 16 - 20 bar					
Test Pressure	3.6 MPa / 36 bar					
Bursting Pressure	≥ 5.5 MPa / 55 bar					
Overall Weight	± 12.000 gr	± 13.000 gr	± 15.000 gr	± 17.000 gr	± 19.000 gr	± 21.000 gr
Temperature Test	-5°F ~ 200°F / -40°C ~ +100°C					
Fire Hose Material	High Tensile NBR / Nitrile Rubber Outer and Liner					
Hose Fitting Material	Aluminium Alloy / Brass					

In line with our policy of continuous improvement we reserve the right to amend any specification without notice.



APPRON

APPRON FIRE FIGHTING SUPPLIER

CATALOG NO. FHR/AP2023